

P

Plastic LED Bulbs SMD 5630



3W



5W



7W



9W



12W



15W



20W



25W



30W



35W




40W

ENELTEC[®]
brighten your ideas



www.eneltec-led.com

Dimensions

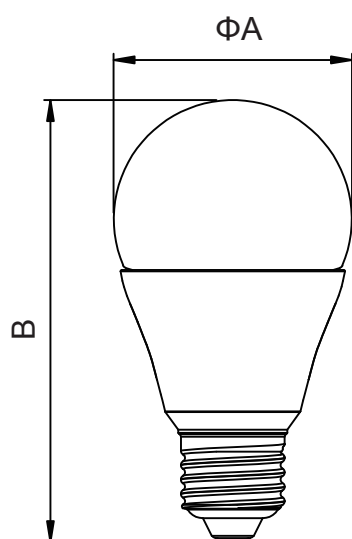

Model	Dimension (mm)	
	A	B
ENBL-3WSMD-02E	$\Phi 45$	77
ENBL-5WSMD-02E	$\Phi 53$	86
ENBL-7WSMD-02E	$\Phi 61$	95
ENBL-9WSMD-02E	$\Phi 69$	104
ENBL-12WSMD-02E	$\Phi 77$	113
ENBL-15WSMD-02E	$\Phi 85$	122
ENBL-20WSMD-02E	$\Phi 95$	133
ENBL-25WSMD-02E	$\Phi 105$	145
ENBL-30WSMD-02E	$\Phi 120$	157
ENBL-35WSMD-02E	$\Phi 135$	169
ENBL-40WSMD-02E	$\Phi 150$	203

Socket



Advantages

NO.1

High Brightness Low light decay

Excellent SMD 5630 led chip.
High Brightness. Long lifespan.
Uniform luminance. No dark
space. View angle 180°



NO.2

No radiation, Professional eye care

Excellent acrylic cover. High
light transmittance. Up to 90%
No glare. Comfortable visual
effects.



NO.3

Low Energy Consumption Environment Protection

Energy saving 80% compared to
the incandescent bulbs and the
energy saving lamps.





Detail Showing

Detail images. Clear showing. Knowing fine quality.

Heat Dissipation Hole Design

Excellent heat dissipation.

Extending the lifespan.



High Quality Led Chip

Surrounding chip. No dark area.

High Quality PMMA cover

High light transmittence.Up to 90%.

No glare.Eye protection.



High Grade Driver

Stable running.Protcteting the led bulbs componets.

More safer and prolonging the lifespan.



RC DRIVER



IC DRIVER



Packaging detail

To do the excellent step to you carefully.



Each product
in a small inner carton.



100 or 50 inner boxes
is loaded into a master carton.

container or cartons are loaded
in the ship or air.



● Dimensions:

Model	ENBL-3WSMD-02E	ENBL-5WSMD-02E	ENBL-7WSMD-02E	ENBL-9WSMD-02E	ENBL-12WSMD-02E	ENBL-15WSMD-02E	ENBL-20WSMD-02E	ENBL-25WSMD-02E	ENBL-30WSMD-02E	ENBL-35WSMD-02E	ENBL-40WSMD-02E
Power (W)	3	5	7	9	12	15	20	25	30	35	40
Lumen Output (LM)	150	230	300	390	460	580	620	720	780	880	970
LED	5pcs SMD5630	8pcs SMD5630	11pcs SMD5630	14pcs SMD5630	17pcs SMD5630	20pcs SMD5630	36pcs SMD5630	42pcs SMD5630	48pcs SMD5630	60pcs SMD5630	70pcs SMD5630
Equivalent Incandescent Lamp	15W	25W	40W	60W	80W	100W	150W	175W	200W	250W	300W
Input Voltage	220-240VAC, 50Hz/60Hz										
Power Factor	<0.5										
Driver	RC Driver						IC Driver				
Beam Angle	180°										
Color	2800-3500K / 6000-6500K						6000-6500K				
CRI	>75										
Base	E14/E27/B22	E27/B22									
Working Temperature	Temperature: -40°C ~ 80°C										
Material	PC bulb body										
Cover	Acrylic Bulb Cover										
Light Source Lifespan	25,000h										
Packing Method	100 pcs/ctn	100 pcs/ctn	100 pcs/ctn	100 pcs/ctn	100 pcs/ctn	100 pcs/ctn	50 pcs/ctn	50 pcs/ctn	50 pcs/ctn	50 pcs/ctn	50 pcs/ctn
Packing Dimension (mm)	240×240×324	280×280×366	320×320×410	355×355×440	395×395×440	437×437×490	497×497×280	545×545×295	605×253×320	677×280×330	747×310×350
Net Weight/ Gross Weight (kg)	3.4/3.7	4.6/5.1	5.8/6.4	7.3/8.0	9.1/10.0	8.9/9.8	8.9/9.8	11.4/11.8	5.7/6.3	6.9/7.6	8.1/8.9