

LED Track Lights



www.eneltec-led.com



SUMMER SALE
at 50% DISCOUNT

Structure




2 wires, 3 wires, 4 wires
adaptor for your choice

PF>0.95, NON Dimmable,
Triac Dimmable, DALI
Dimmable for option

15°/24°/38°/60° beam angle
available

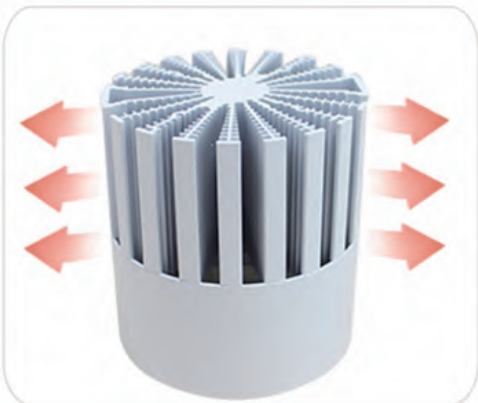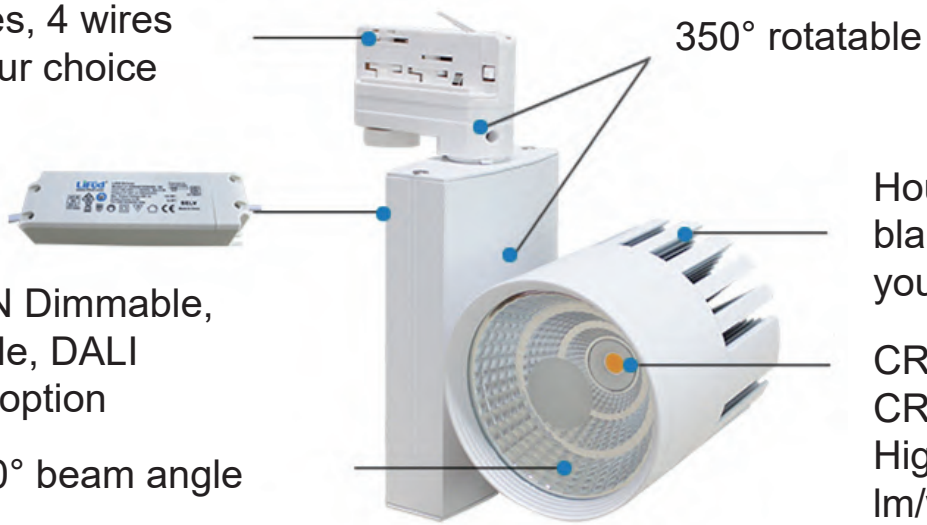


Accessories

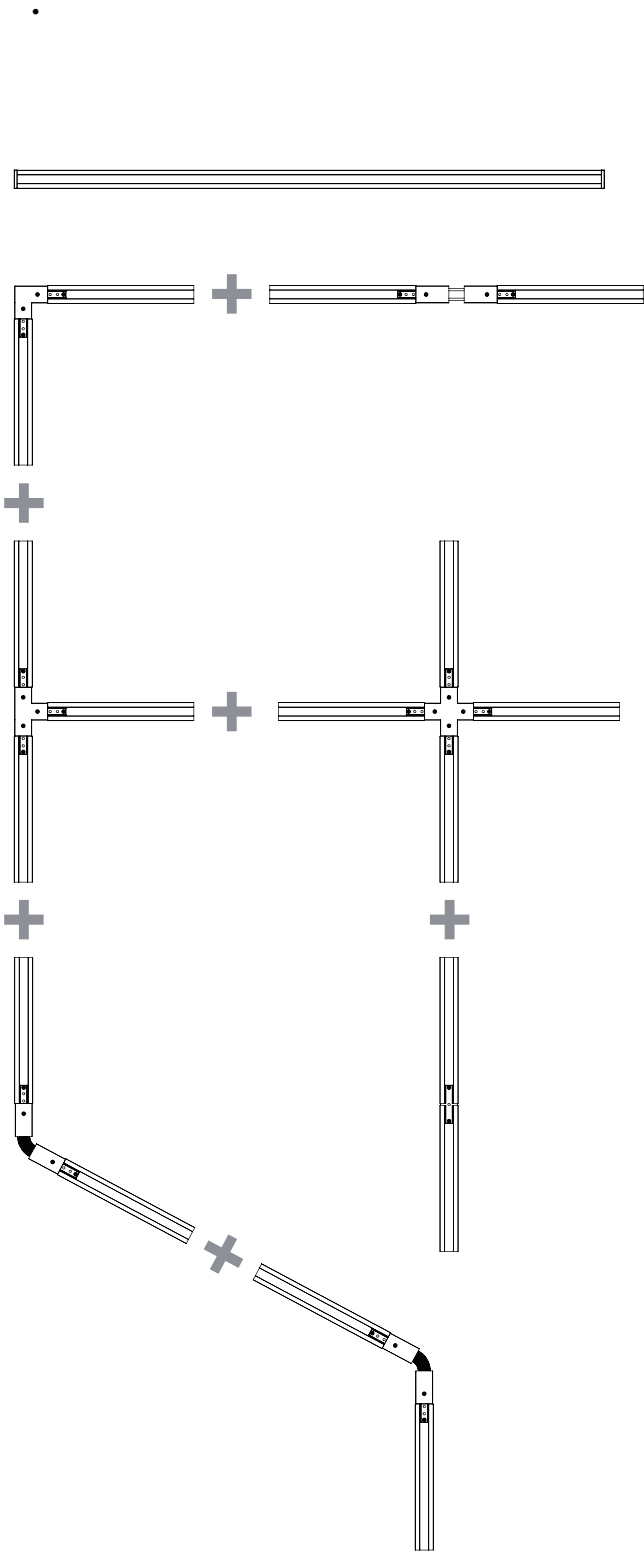

Data














Model No.	ENDL-10W-05	ENDL-20W-05	ENDL-30W-05	ENDL-40W-05	ENDL-50W-05	ENDL-60W-05
Input Voltage	85-265VAC	85-265VAC	85-265VAC	85-265VAC	85-265VAC	85-265VAC
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
Power (W)	10	20	30	40	50	60
Lumen Output	900	1800	2700	3600	4500	5400
Luminous Efficiency	90lm/W	90lm/W	90lm/W	90lm/W	90lm/W	90lm/W
CRI	Ra> 80	Ra> 80	Ra> 80	Ra> 80	Ra> 80	Ra> 80
Beam Angle	15°/24°/ 38°/60°	15°/24°/ 38°/60°	15°/24°/ 38°/60°	15°/24°/ 38°/60°	15°/24°/ 38°/60°	15°/24°/ 38°/60°
LED	CREE	CREE	CREE	CREE	CREE	CREE
Color Temperature	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K
Lumen Maintenance	70% (50,000Hrs)	70% (50,000Hrs)	70% (50,000Hrs)	70% (50,000Hrs)	70% (50,000Hrs)	70% (50,000Hrs)
Warranty	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years

Dimensions

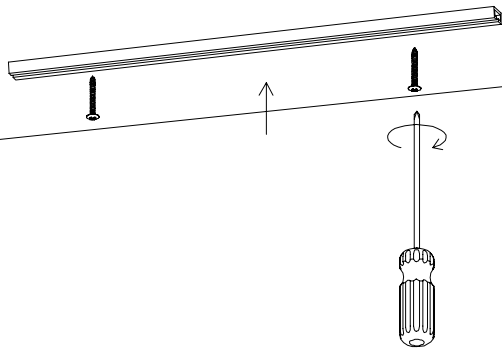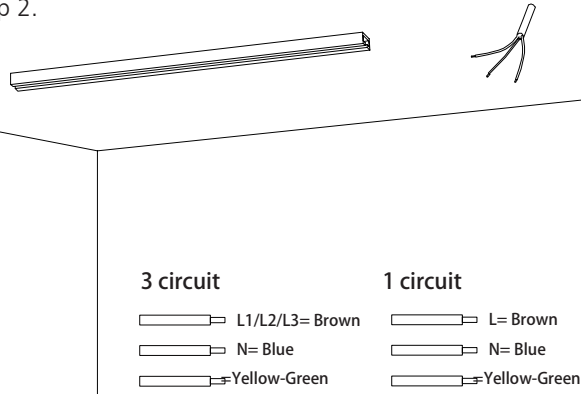

Model No.	Dimension		
	Length (mm)	Width (mm)	Height (mm)
ENDL-10W-05(D)	123	100	210
ENDL-20W-05(D)	123	100	210
ENDL-30W-05(D)	123	100	210
ENDL-40W-05(D)	153	100	210
ENDL-50W-05(D)	153	100	210
ENDL-60W-05	123	100	210

Installation
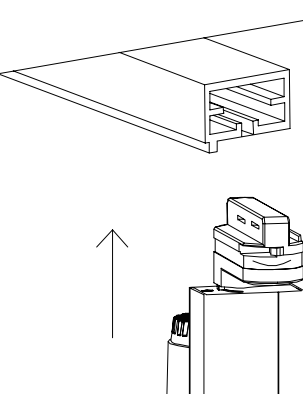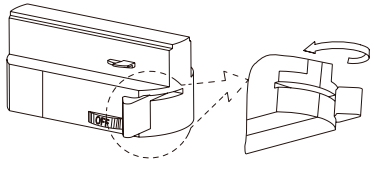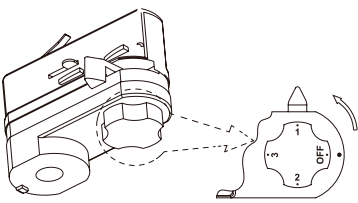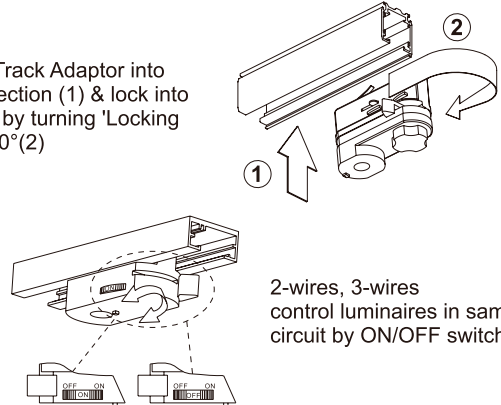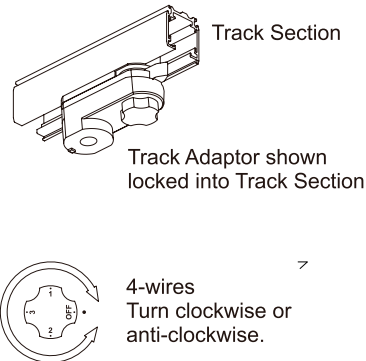
<p>Step 1.</p> 	<p>Step 2.</p>  <p>3 circuit</p> <ul style="list-style-type: none">  L1/L2/L3= Brown  N= Blue  Yellow-Green <p>1 circuit</p> <ul style="list-style-type: none">  L= Brown  N= Blue  Yellow-Green
<p>Step 3.</p> 	<p>Step 4.</p>  <p>2-wires, 3-wires adaptor</p> <p>Prior to locating Adaptor into Track Section make sure it is set in the 'OFF' position & 'Locking Lever' is set in the position shown.</p>
<p>Step 5.</p>  <p>4-wires adaptor</p> <p>Prior to locating Adaptor into Track Section make sure it is set in the 'OFF' position & 'Locking Lever' is set in the position shown.</p>	<p>Step 6.</p>  <p>Locate Track Adaptor into Track Section (1) & lock into position by turning 'Locking Lever' 90°(2)</p> <p>2-wires, 3-wires control luminaires in same circuit by ON/OFF switch.</p>
<p>Step 7.</p>  <p>Track Section</p> <p>Track Adaptor shown locked into Track Section</p> <p>4-wires Turn clockwise or anti-clockwise.</p>	<p>Step 8.</p> 