

LED Trunk Lights



BRIDGELUX
www.eneltec-led.com



Features:

1. Use die-casting aluminum alloy as main-body material.
2. Use high light transmittance toughened glass as cover material.
3. Unique and beautiful looking design.
4. Good heat dissipation performance guarantee the long life span.
5. Unibody design with main-body and adapter.
6. Use LED driver, high effective and energy-saving.
7. Can replace traditional downlight.





Application:

Hotel room, passage, home decoration, office...




Dimenions (unit:mm):

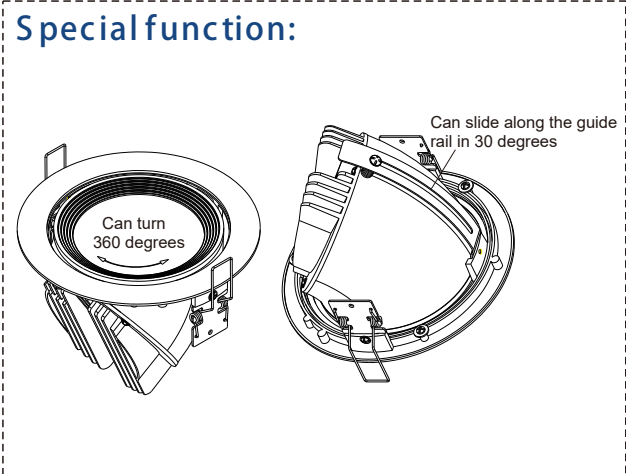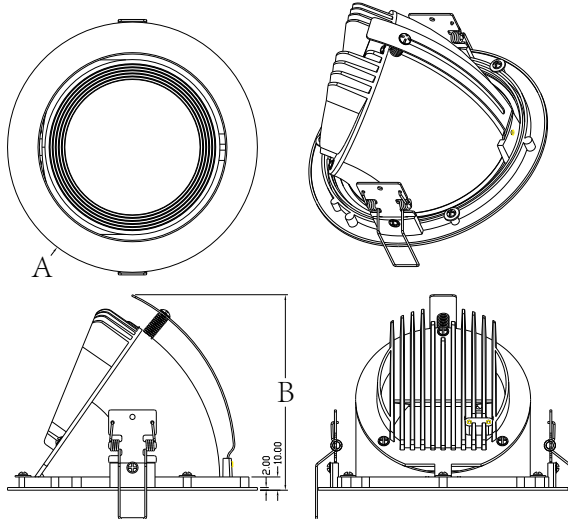

Model No.	Dimension		
	Length A (mm)	Height B (mm)	Hole C (mm)
ENDL-5W-03	Φ90/3.5 Inch	75	75
ENDL-7W-03	Φ90/3.5 Inch	75	75
ENDL-10W-03	Φ115/4.5 Inch	90	100
ENDL-12W-03	Φ115/4.5 Inch	90	100
ENDL-13W-03	Φ140/5.5 Inch	120	130
ENDL-20W-03	Φ140/5.5 Inch	120	130
ENDL-25W-03	Φ165/6.5 Inch	145	155
ENDL-30W-03	Φ165/6.5 Inch	145	155
ENDL-40W-03	Φ190/7.5 Inch	165	175



Installation drawing

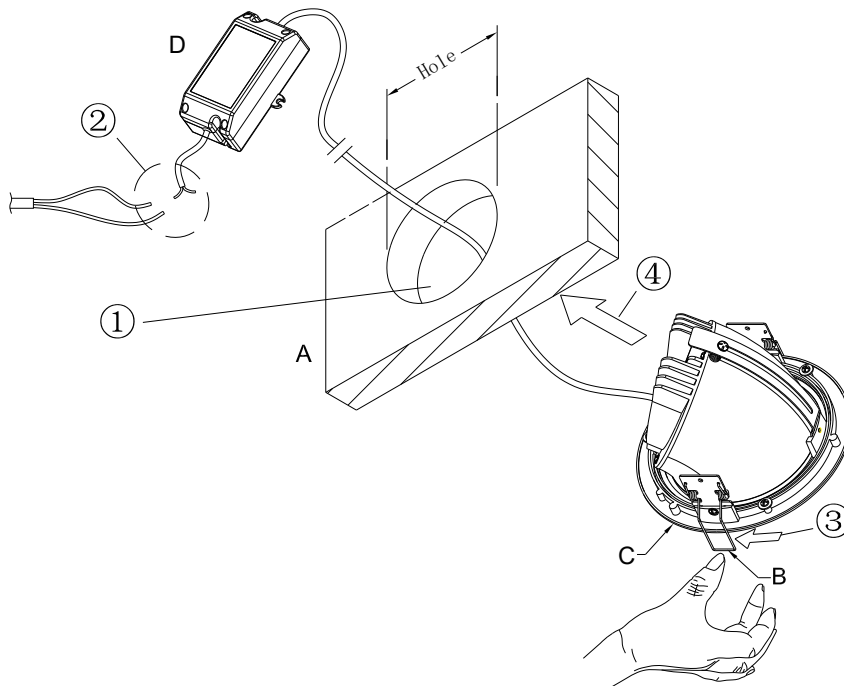

①	make a hole
②	connect the power wire
③	push spring
④	put the lamp into the hole

A	Wall
B	Spring
C	LED lamp
D	Driver

Installation information:

Power must be cut off before installation, fix it on the position of installation holes, connection of the power supply must be sealed.

! Notice

1. Please read the specification first, to make sure the service environment matches the condition in the specification before using.
2. Please confirm the applicable power supply before using.
3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
4. Operation against rules may damage your property even harm to your personal safety.
5. Preliminarily estimate required quantity of LED lights, then according to the power rating of single LED light to figure out the total power and design power supply plan.
6. Using environment: -20°C to 45°C.
7. Dangerous high voltage, Non-professionals are not allowed to maintain the products.
8. If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.

