ENELTEC®
brighten your ideas

SMD LED Flood Lights

EPISTAR

MEAN WELL
LED DRIVER

CE

RoHS

WARRANTY 5 YEARS WARRANTY

www.eneltec-led.com

Data

Power	50W	75W	100W	150W	200W
Input Voltage	100-305VAC				
Driver	MEANWELL				
Lumen (Lm)	5750	8625	11500	17250	23000
Color	3000K/4000K/5000K/6000K				
LED	50pcs Epistar SMD3030	80pcs Epistar SMD3030	100pcs Epistar SMD3030	150pcs Epistar SMD3030	240pcs Epistar SMD3030
Beam Angle	120°				
PF	0.95				
CRI	70				
IP Rating	IP65				

Dimensions

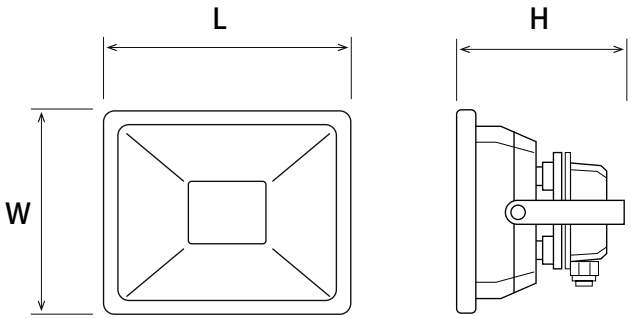

Power	Dimension (mm)			Packing				
	L	W	H	L (mm)	W (mm)	H (mm)	GW(kg)	Quantity
50W	310	220	50	38	28	52	17.78	8
75W	355	245	50	44	35	14	3.74	1
100W	402	295	60	49	40	14	4.61	1
150W	430	330	60	52	45	14	6.29	1
200W	470	360	60	56	47	14	7.26	1

Installation

1. Turn off the power
2. Adjust the mounting bracket (the mounting bracket allows you to choose the necessary light direction and to set the desired angle of a lighting fixture

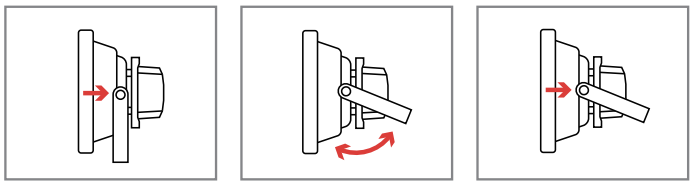

Use a wrench to loosen the adjust the mounting bracket and tighten the screw screw on the mounting bracket to your desired angle.

3. Fix the lighting fixture with screws of corresponding size.



4. Connect power cord of Flood Light to the nearest properly installed and grounded junction box of power with suitable strain relief means for power cord.

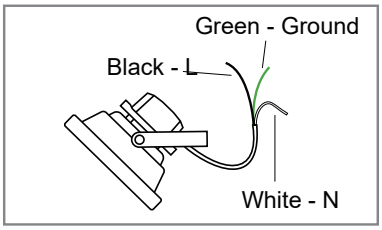

5. Turn on the main power. Installation is finished.

Application