

ENELTEC®

brighten your ideas

T5 LED Tubes




Specifications:

- Voltage: 100-240
- Color: 3000K / 4000K / 5500-6000K
- Operating temperature: -35 to + 50°C
- Material: PC cover & Aluminum back
- Light Degradation: < 5% in 30,000 hours
- Warranty: 3 years



Eneltec Group / Global Marketing Center / Eneltec (Shanghai) Co., Ltd.
Tel: 86-21-33811921 86-21-33811922 Fax: 86-21-33811923
E-mail: sales@eneltec-led.com <http://www.eneltec-led.com>

Model	Dimension (mm)
ENLT-T5060	604 Φ15
ENLT-T5120	1204 Φ15

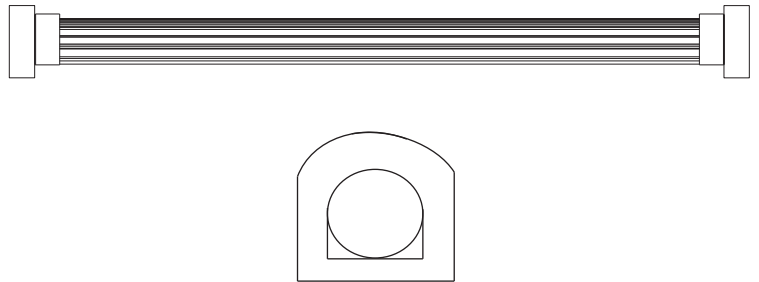

Applications:

High power LED Tube are designed for use in supermarkets, jeweller's shops, advertisement box, office building, or for direct replacement of conventional lamps.

Features and advantages:

- Direct replacement of conventional lamps
- LED life of 50,000 hours continuous work
- No hazard of mercury or lead entering the environment
- Solid-state, shock and vibration resistant light sources runs on
- Major reduction in power costs, maintenance free
- Generate little heat
- No fluorescent flickering
- No danger of broken glass
- Internal power supply with high power factor & low harmonic current



Testing Data:

Model	ENLT-T5060-NI-02	ENLT-T5120-NI-02
Voltage	100-240VAC	
LED	48pcs SMD2835	96pcs SMD2835
Power	7	16
PF	0.9	
Lumen	700	1600
Beam Angle	120°	
Color	3000K / 4000K / 5500-6000K	
Cover	Clear/Frosted	
Driver	Non Isolated Driver	

Warning:

1. It is non-waterproof.
2. Please do not touch it when they are light.
3. Please use traditional coop transformer and switch for power supply. Do not use traditional electronic transformer for power supply.
4. The angle of emitting light can be designed according to the client's requirements