


COB LED Street Lights



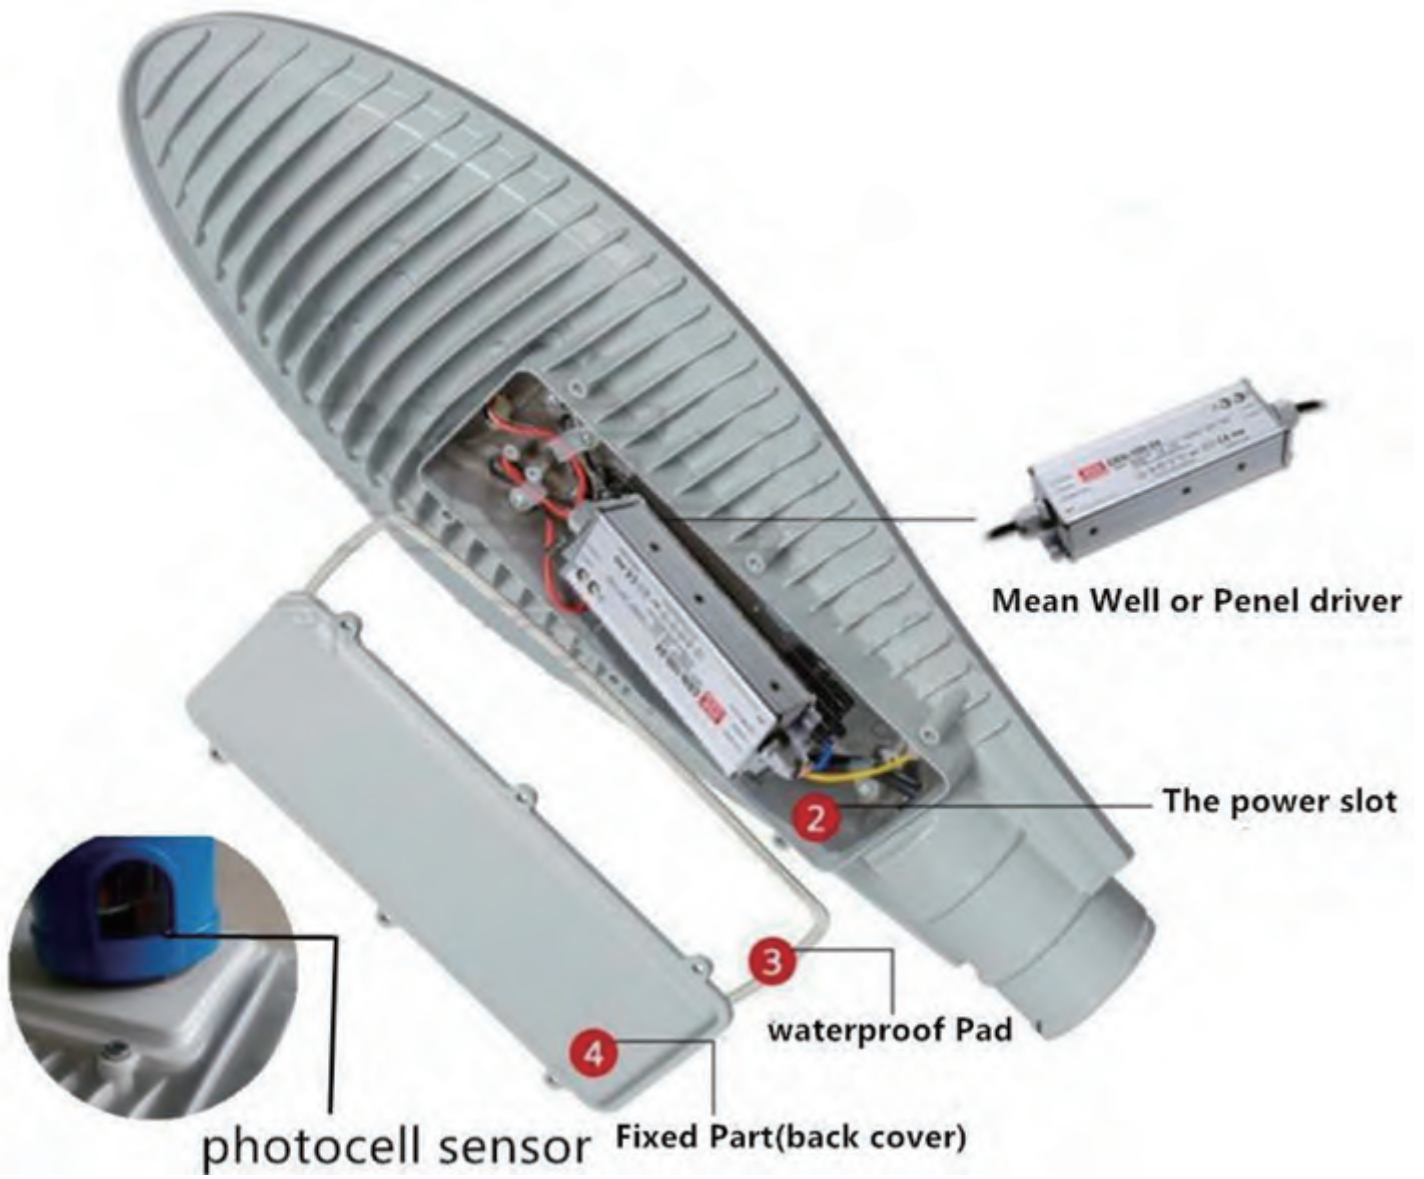

Product Datasheet


Electrical Data:

Nominal Voltage	12/24VDC / 85-265VAC
LED	EPISTAR COB
Driver	CE/MEANWELL
Power Factor (PF)	>0.90
THD	<15
SPD	20KV (available on request)
Optics	140°*90°
Standard Deviation of Color Matching	<5 SDCM
CRI	Ra>70 (Default) / Ra>80
CCT	3000K, 4000K, 5000K, 6000K


General Data

Body Material	High pressure die-cast aluminum
Housing Color	Grey /Black
Cover Material	Tempered glass
Lens Material	UV-resistant Polycarbonate
Working Environment	-40°C ~ +50°C, 10%~90%RH
Lifespan L70 at 25 °C	>100, 000 h
Mounting Type	Side entry
Dimmable	Non-dimming
Protection Class	Class I
Standards	CE, RoHS, LM79, LM80, TM-21, IP65, IK10
Available on request	Photocell

Optional accessories




Photocell




"80-60mm"




"60-40mm"




Square to round




"T" Type



"L" Type



"2" in "1"



"4" in "1"

Production

