



ITEM No.: ENSL-30W-08

### Electrical Specifications

- **Led Power** 30w
- **IP Grade** IP66
- **IK** IK08
- **Input Voltage** AC90-305V
- **Operating Temperature** -40°C to +55°C
- **Driver Brand** Done driver
- **Power Factor (PF)** >0.95
- **Certification** CE,ROHS

### Photometric & Packing Specifications

- |   |   |
|---|---|
| • <b>Led Lamp</b> SMD 3030 <b>PHILIPS</b> | • <b>Material</b> Die-casting Aluminum+Optical Lens |
| • <b>Led Quantity</b> 50pcs LEDs          | • <b>CCT</b> 2700k~6500k                            |
| • <b>Lumen Output</b> >3900LM             | • <b>CRI</b> >80                                    |
| • <b>Light Efficient</b> 130lm/w          | • <b>Beam angle</b> 80°*150°                        |


#### Fix the arm packing

- |                          |                           |
|--------------------------|---------------------------|
| <b>NW/GW</b>             | 1.1kg/1.9kg               |
| <b>Product size</b>      | 415*170*70mm              |
| <b>Inner Carton size</b> | 175*425*77mm, 1pcs/CTN    |
| <b>Outer Carton size</b> | 405*440*365 mm, 10pcs/CTN |


#### Arm angle ajustable packing

- |                          |                          |
|--------------------------|--------------------------|
| <b>NW/GW</b>             | 1.4kg/2.2kg              |
| <b>Product size</b>      | 493*170*70mm             |
| <b>Inner Carton size</b> | 175*500*90mm, 1pcs/CTN   |
| <b>Outer Carton size</b> | 470*515*365mm, 10pcs/CTN |

### Product size(Unit:mm/in)

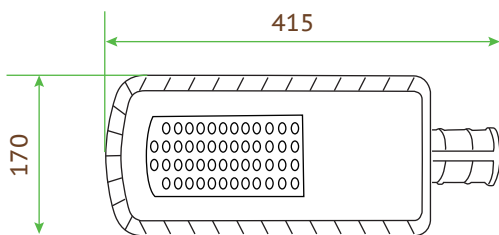

**Fix the arm**

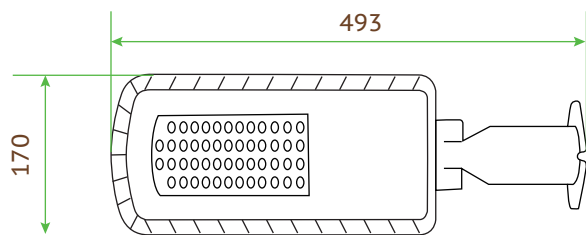

**Arm angle ajustable**



ITEM No.: ENSL-50W-08

### Electrical Specifications

- **Led Power** 50w
- **IP Grade** IP66
- **IK** IK08
- **Input Voltage** AC90-305V
- **Operating Temperature** -40°C to +55°C
- **Driver Brand** Done driver
- **Power Factor (PF)** >0.95
- **Certification** CE,ROHS,TUV,ETL

### Photometric & Packing Specifications

- |                          |                         |                     |                                   |
|--------------------------|-------------------------|---------------------|-----------------------------------|
| • <b>Led Lamp</b>        | SMD 3030 <b>PHILIPS</b> | • <b>Material</b>   | Die-casting Aluminum+Optical Lens |
| • <b>Led Quantity</b>    | 50pcs LEDs              | • <b>CCT</b>        | 2700k~6500k                       |
| • <b>Lumen Output</b>    | >6500LM                 | • <b>CRI</b>        | >80                               |
| • <b>Light Efficient</b> | 130lm/w                 | • <b>Beam angle</b> | 80°*150°                          |


#### Fix the arm packing

- |                          |                          |
|--------------------------|--------------------------|
| <b>NW/GW</b>             | 1.2kg/2kg                |
| <b>Product size</b>      | 415*170*70mm             |
| <b>Inner Carton size</b> | 175*425*77mm, 1pcs/CTN   |
| <b>Outer Carton size</b> | 405*365*440mm, 10pcs/CTN |


#### Arm angle adjustable packing

- |                          |                          |
|--------------------------|--------------------------|
| <b>NW/GW</b>             | 1.5kg/2.3kg              |
| <b>Product size</b>      | 493*170*70mm             |
| <b>Inner Carton size</b> | 175*500*90mm, 1pcs/CTN   |
| <b>Outer Carton size</b> | 470*515*365mm, 10pcs/CTN |

### Product size(Unit:mm/in)

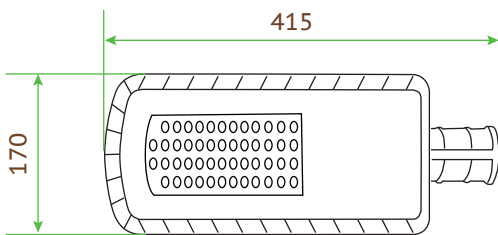

**Fix the arm**

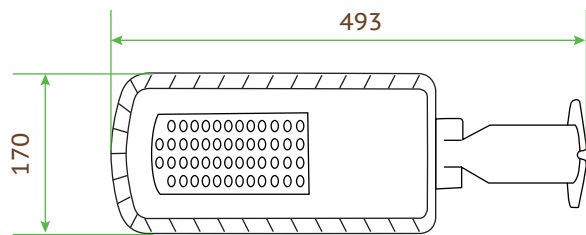

**Arm angle adjustable**



ITEM No.: ENSL-100W-08

**Electrical Specifications**

- **Led Power** 100w
- **IP Grade** IP66
- **IK** IK08
- **Input Voltage** AC90-305V
- **Operating Temperature** -40°C to +55°C
- **Driver Brand** Done driver
- **Power Factor (PF)** >0.95
- **Certification** CE,ROHS,TUV,ETL

**Photometric & Packing Specifications**

- |                          |                         |                     |                                   |
|--------------------------|-------------------------|---------------------|-----------------------------------|
| • <b>Led Lamp</b>        | SMD 3030 <b>PHILIPS</b> | • <b>Material</b>   | Die-casting Aluminum+Optical Lens |
| • <b>Led Quantity</b>    | 100pcs LEDs             | • <b>CCT</b>        | 2700k~6500k                       |
| • <b>Lumen Output</b>    | >13000LM                | • <b>CRI</b>        | >80                               |
| • <b>Light Efficient</b> | 130lm/w                 | • <b>Beam angle</b> | 80°*150°                          |


**Fix the arm packing**

- |                          |                          |
|--------------------------|--------------------------|
| <b>NW/GW</b>             | 1.9kg/2.7kg              |
| <b>Product size</b>      | 495*190*70mm             |
| <b>Inner Carton size</b> | 195*505*77mm, 1pcs/CTN   |
| <b>Outer Carton size</b> | 405*405*520mm, 10pcs/CTN |


**Arm angle ajustable packing**

- |                          |                          |
|--------------------------|--------------------------|
| <b>NW/GW</b>             | 2.2kg/3kg                |
| <b>Product size</b>      | 573*190*70mm             |
| <b>Inner Carton size</b> | 195*580*90mm, 1pcs/CTN   |
| <b>Outer Carton size</b> | 470*595*405mm, 10pcs/CTN |

**Product size(Unit:mm/in)**

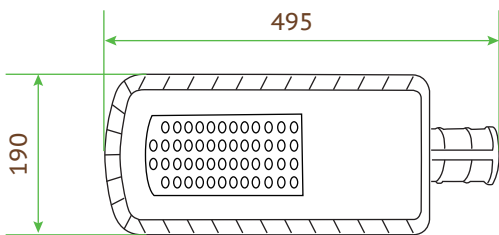

**Fix the arm**

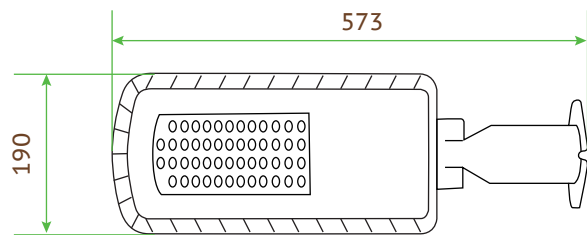

**Arm angle ajustable**



ITEM No.: ENSL-150W-08

### Electrical Specifications

- **Led Power** 150w
- **IP Grade** IP66
- **IK** IK08
- **Input Voltage** AC90-305V
- **Operating Temperature** -40°C to +55°C
- **Driver Brand** Done driver
- **Power Factor (PF)** >0.95
- **Certification** CE,ROHS,TUV,ETL

### Photometric & Packing Specifications

- |                          |                         |                     |                                   |
|--------------------------|-------------------------|---------------------|-----------------------------------|
| • <b>Led Lamp</b>        | SMD 3030 <b>PHILIPS</b> | • <b>Material</b>   | Die-casting Aluminum+Optical Lens |
| • <b>Led Quantity</b>    | 150pcs LEDs             | • <b>CCT</b>        | 2700k~6500k                       |
| • <b>Lumen Output</b>    | >19500LM                | • <b>CRI</b>        | >80                               |
| • <b>Light Efficient</b> | 130lm/w                 | • <b>Beam angle</b> | 80°*150°                          |


#### Fix the arm packing

- |                          |                         |
|--------------------------|-------------------------|
| <b>NW/GW</b>             | 2.5kg/3.5kg             |
| <b>Product size</b>      | 595*210*80mm            |
| <b>Inner Carton size</b> | 210*605*90mm, 1pcs/CTN  |
| <b>Outer Carton size</b> | 230*615*470mm, 5pcs/CTN |


#### Arm angle ajustable packing

- |                          |                         |
|--------------------------|-------------------------|
| <b>NW/GW</b>             | 2.9kg/3.8kg             |
| <b>Product size</b>      | 665*210*80mm            |
| <b>Inner Carton size</b> | 210*670*90mm, 1pcs/CTN  |
| <b>Outer Carton size</b> | 445*685*475mm, 5pcs/CTN |

### Product size(Unit:mm/in)

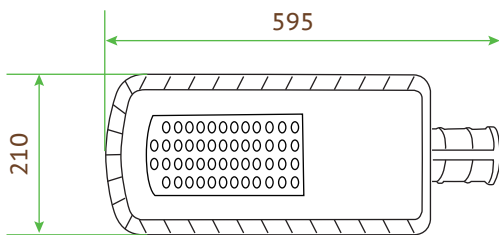

**Fix the arm**

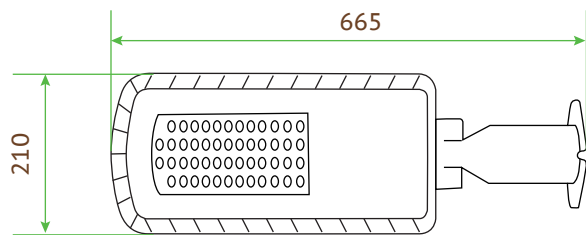

**Arm angle ajustable**



ITEM No.: ENSL-200W-08

### Electrical Specifications

- **Led Power** 200w
- **IP Grade** IP66
- **IK** IK08
- **Input Voltage** AC90-305V
- **Operating Temperature** -40°C to +55°C
- **Driver Brand** Done driver
- **Power Factor (PF)** >0.95
- **Certification** CE,ROHS,TUV,ETL
- **Warranty** 3 years

### Photometric & Packing Specifications

- |                          |             |                |                     |                                   |
|--------------------------|-------------|----------------|---------------------|-----------------------------------|
| • <b>Led Lamp</b>        | SMD 3030    | <b>PHILIPS</b> | • <b>Material</b>   | Die-casting Aluminum+Optical Lens |
| • <b>Led Quantity</b>    | 200pcs LEDs |                | • <b>CCT</b>        | 2700k~6500k                       |
| • <b>Lumen Output</b>    | >26000LM    |                | • <b>CRI</b>        | >80                               |
| • <b>Light Efficient</b> | 130lm/w     |                | • <b>Beam angle</b> | 80°*150°                          |


#### Fix the arm packing

- |                          |                         |
|--------------------------|-------------------------|
| <b>NW/GW</b>             | 3.4kg/4.4kg             |
| <b>Product size</b>      | 645*230*80mm            |
| <b>Inner Carton size</b> | 235*655*90mm, 1pcs/CTN  |
| <b>Outer Carton size</b> | 250*665*470mm, 5pcs/CTN |


#### Arm angle ajustable pcking

- |                          |                         |
|--------------------------|-------------------------|
| <b>NW/GW</b>             | 3.7kg/4.7kg             |
| <b>Product size</b>      | 710*230*80mm            |
| <b>Inner Carton size</b> | 235*720*90mm, 1pcs/CTN  |
| <b>Outer Carton size</b> | 470*735*485mm, 5pcs/CTN |

### Product size(Unit:mm/in)

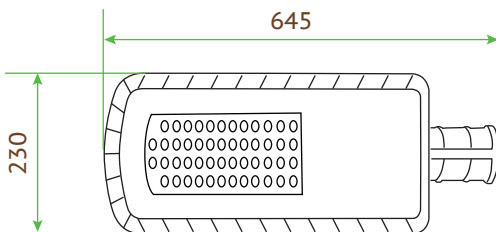

**Fix the arm**

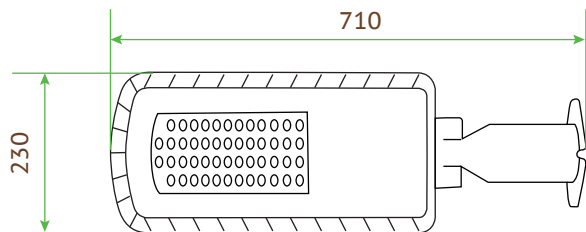

**Arm angle ajustable**