



Ballast Compatible T8 LED Tubes




Specifications:

- Voltage: 120-277VAC
- Color: 2800-3300K / 4000-4500K / 5500-6000K
- Operating temperature: -20 to + 40°C
- Material: PC cover & Aluminum back
- Light Degradation: < 5% in 30,000 hours
- Warranty: 3 years



Model	Dimension(mm) A*B*C
ENLT-T8060-04B	590*604*26
ENLT-T8120-04B	1198*1212*26
ENLT-T8150-04B	1498*1512*26

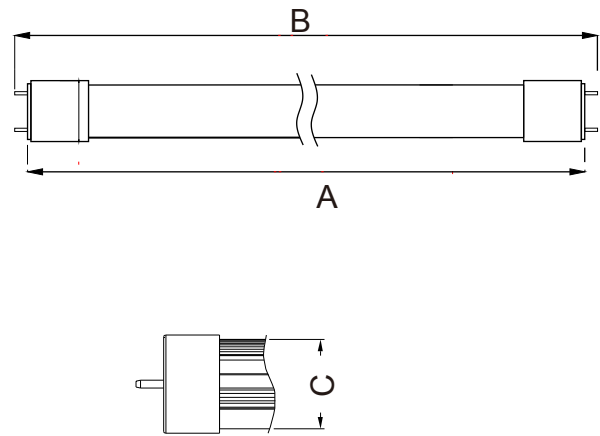

Applications:

High power LED tubes are designed for use in supermarkets, jeweller's shops, advertisement box, office building, or for direct replacement of conventional lamps.

Features and advantages:

- Direct replacement of conventional lamps
- LED life of 50,000 hours continuous work
- No hazard of mercury or lead entering the environment
- Solid-state, shock and vibration resistant light sources runs on
- Major reduction in power costs, maintenance free
- Generate little heat
- No fluorescent flickering
- No danger of broken glass
- Internal power supply with high power factor & low harmonic current



Testing Data

Model	ENLT-T8060-04B	ENLT-T8120-04B	ENLT-T8150-04B
Color	2800-3300K / 4000-4500K / 5500-6000K		
Input Voltage	120-277VAC		
Socket Type	G13		
Power	10	16	20
Power Factor	0.95		
Beam Angle	120°		
Lumen	1000	1600	2000
LED	SMD2835	SMD2835	SMD2835
CRI	80	80	80
IP Rating	IP43		
Life time	>50,000 Hours		

Packing

Model	ENLT-T8060-04B	ENLT-T8120-04B	ENLT-T8150-04B
Quantity	25PCS	25PCS	25PCS
Carton (mm)	665×210×200	1265×210×200	1565×210×200
Net Weight (Kg)	4.0	8.0	10.0
Gross Weight (Kg)	5.0	9.0	11.5

Wiring Diagram

